


SEPARABLE SOCKETS
STEEL & 316 SS STEEL

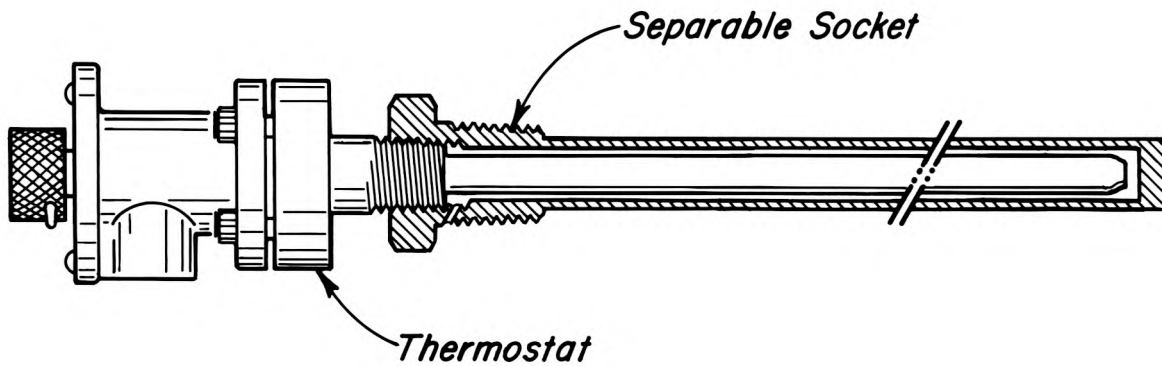

SOCKETS AVAILABLE:

CAT. NO.	MALE THD. SIZE,NPT	MODEL NUMBER	MATERIAL	MAX W.P.	
				psig	kg/cm ²
HCA	1"	SS-4	STL	4,000	281.23
HCB	1"	SS-6	STL	4,000	281.23
HCC	1"	SS-12	STL	4,000	281.23
HCD	1"	SS-18	STL	4,000	281.23
HCE	1"	SS-12SS	SS6	4,000	281.23
HCF	1"	SS-18SS	SS6	4,000	281.23
HCG ^a	1"	S-SS-12SS	SS6	7,000	492.15
HCH	3/4"	3/4SS-12	STL	4,000	281.23
HCI	3/4"	3/4SS-18	STL	4,000	281.23
HCJ	3/4"	3/4SS-12SS	SS6	4,000	281.23
HCK	3/4"	3/4SS-18SS	SS6	4,000	281.23
HCL	3/4"	3/4SS-4	STL	4,000	281.23
HCM	3/4"	3/4SS-6	STL	4,000	281.23
HCMSS6	3/4"	3/4SS-6SS	SS6	4,000	281.23
HCN	1"	SS-6SS	SS6	4,000	281.23
HCP	3/4"	SS-4SS	SS6	4,000	281.23
HCR ^a	3/4"	S-SS-12SS	SS6	5,000	351.53
HCS ^a	1"	S-SS-6SS	SS6	7,000	492.15

NOTES:

APPLICATION:
Increases working pressure of Thermostat Sensing Element. All Separable Sockets are filled with high temperature grease. Allows Thermostat removal without losing vessel pressure.

^aOne piece construction



Kimray is an ISO 9001- certified manufacturer.